
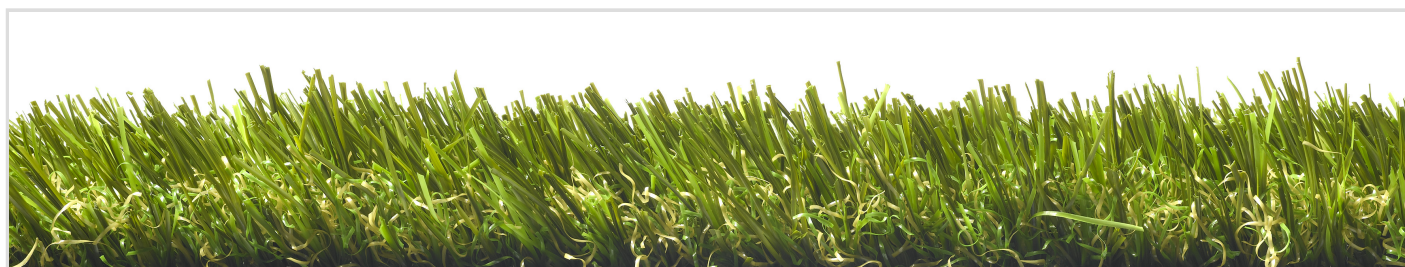


## Greenland 40

<b>Type</b>	Tufted synthetic grass carpet	
<b>Material</b>	58% PE Monofilament straight & 42% PP Monofilament curled (UV Stabilized)	
<b>Yarn type</b>	4.500 / 9 dTex PE monofilament straight & 3.200 / 8 dTex PP monofilament curled	
<b>Yarn quality</b>	Environmental friendly, free of lead and cadmium	
<b>Primary backing</b>	100% PP black with fleece, UV Stabilized, Weight 100 gr/m <sup>2</sup>	
<b>Secondary backing</b>	Black Latex compound with a base of styrenebutadiene (SBR), with drainage holes, Weight 760 gr/m <sup>2</sup>	
<b>Waterpermeability</b>	60 liter/min/m <sup>2</sup>	
<b>Pile height</b>	40 mm	
<b>Face weight</b>	1.560 gr/m <sup>2</sup>	± 10%
<b>Total weight</b>	2.420 gr/m <sup>2</sup>	± 10%
<b>Tuft gauge</b>	5/16 gauge	
<b>Stitches per 10 cm linear</b>	17	± 1%
<b>Stitches per m<sup>2</sup></b>	21.420	± 10%
<b>Colour</b>	Mix of light and dark green + Field-Jute thatch	
<b>UV stability</b>	Meets DIN 53387 Standard (6000 hours)	
<b>Colour fastness</b>	Xenon Test: Blue Scale > 7, Grey-scale > 4	
<b>Colour lining</b>	Not Applicable	
<b>Roll width</b>	200 cm, 400 cm	
<b>Roll length</b>	20-25m	
<b>Applications</b>	Gardens, Landscaping	
<b>Infill advice</b>	Silica sand, gradation 0,5 - 1,0 mm, 80% roundshaped, appr. 6 - 8 kg/m <sup>2</sup>	
<b>Comments</b>	Before installation make sure the rolls are from the same production code (first five digits of the roll number) Project.	

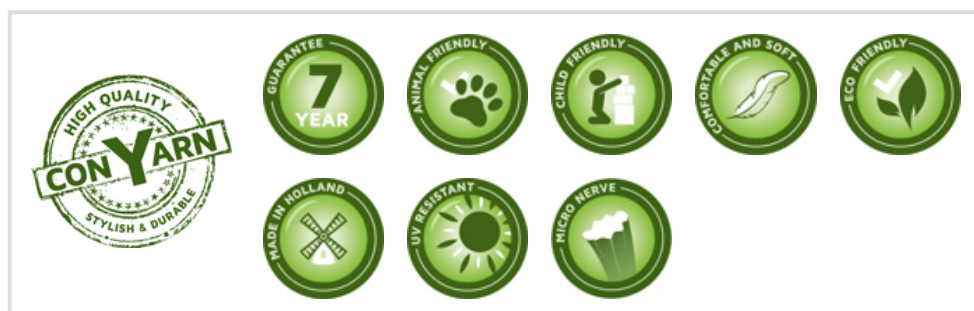

Condor Grass has the right to alter each product specification in order to improve the carpet according to the newest technological applications. Condor Grass is not legally liable in case of non-compliance with the above mentioned specifications. The above mentioned specifications are for reference, and can only be used informal. The appearance of the final artificial grass carpet may change when it reaches temperatures beyond 75°C.